

Accessories

Filter/Regulators

Model No.	Model	Fits Pump
1500DP	AC20B-02G-B	NDP-5, DP-10, NDP-15
1500DP	AC25B-02G-B	NDP-20/P20
1500DP	AC30B-03G-B	NDP-25/P25, 32
1500DP	AC40B-04G-B	NDP-40/H40
1500DP	AC50B-06G-B	NDP-50/H50/P50, 80/H80



Companion Flange

JIS, DIN, ANSI and Ferrule Flanges made of SUS304 or SUS316 or PP



Pneumatic Cycle Counter


Pneumatic 8-digit mechanical type counter



- ✓ Pump Mounting Bracket is available upon request
- ✓ No count up in dry run
- ✓ No reset function
- ✓ Modification on the center body is required for installation

Model No.	Model	Fits Pump
803413	NMC-ANS	DP-10, NDP-15 ~ 80
804847	NMC-ANH	NDP-H Series

*Except NDP-P20,P25

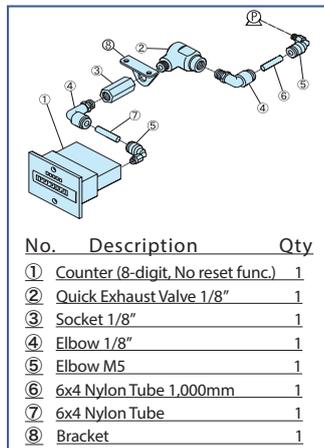

No.	Description	Qty
①	Counter (8-digit, No reset func.)	1
②	Quick Exhaust Valve 1/8"	1
③	Socket 1/8"	1
④	Elbow 1/8"	1
⑤	Elbow M5	1
⑥	6x4 Nylon Tube 1,000mm	1
⑦	6x4 Nylon Tube	1
⑧	Bracket	1

Raised Pump Bracket

Raised Pump Bracket is available on request



Dry-Run Detector

The Yamada ESV-06/DRD-100 detects increases in air volume due to loss of prime or dry-running, and automatically shuts down the pump to prevent excess cycling and increased diaphragm wear.



Model No.	Model	Supply Air Press	Usable Gas	Air Inlet	Air Outlet
854006	ESV-06			Rc3/4"	Rc3/4"
854008	DRD-100	0.2-0.99MPa	Air / Nitrogen	NPT3/4"	NPT3/4"

Diaphragm Monitoring Kit

For NDP-40, 50 and 80 series, install the street elbow between muffler and exhaust port.

PT thread: 634050, NPT thread: 685716 (Sold separately)

For the DP-F series, install the Sensor Mounting Kit between the sensor and the body.

the Sensor Mounting Kit: 804042 (Sold separately)



Model No.	Model	Fits Pump	Power Supply
805139	DMS-24TN	Except NDP-5 to15	DC24V

Model No.	Model,Description
685968	24V AC Adapter
685969	Extension sensor cord 5M
685016	Gasket
771622	Union

Anti-Stall Device

Retrofit-able kit that pneumatically activates the air valve instantly starting pump operation

***Please use with dedicated sleeve**

Model No.	Model	Fits Pump
804066	SVT-225	NDP-20,25,32
804065	SVT-458	NDP-40,50,80



Dedicated Sleeve

Model No.	Model
804739	Sleeve for SVT225
804740	Sleeve for SVT458




High-Low Level Controller

This unit is used to control the high and low levels of liquid being pumped into or out of a container. This device is driven by compressed air and is therefore suitable for use in highly explosive environments.

The system is also designed to work in many harsh environments, e.g. areas with high temperature, high humidity or even areas where there are high electromagnetic fields.


It can handle any liquid with a viscosity of less than 1000cps.

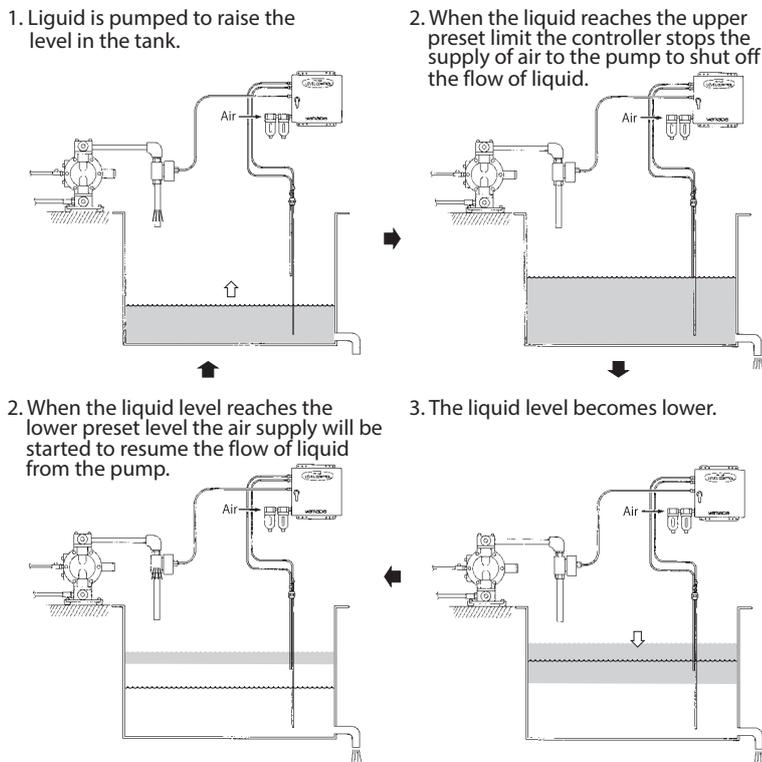

Model No.	Model	Supply Air Press.	Output Air Flow	Viscosity Limit	Weight
480005	SA-4150	0.3-0.7MPa	Max 300L/min	1Pa·s or less	6kg

Suction Tube Kit for Drum

This Suction Tube kit fits to the 200L drum. Pump is recommended to be mounted at the height of 1M from floor level.

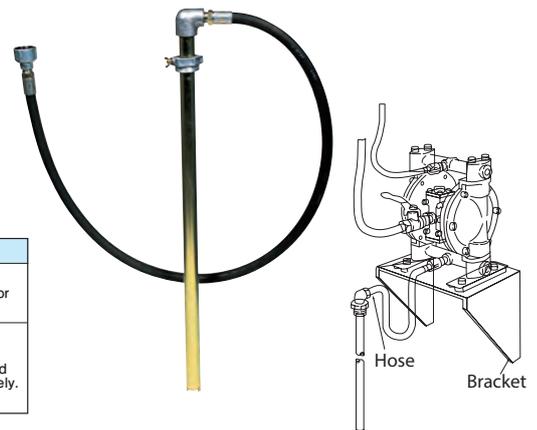

Material	Model No.	Model	Fits Pump	Hose	Connection	Accessories	Remark
Carbon steel	850126	SCK-200D	Size 20	Oil hose 3/4"x2M	R3/4" with Rc1-1/2" socket	Drum bung adapter (ADC12)	Please prepare suitable connector separately.
	851004	SCK-200D-HV	Size 25,40	Oil hose 1"x2M	R1" with Rc1-1/2" socket	Drum bung adapter (ADC12)	
SUS 304	803407	STU-20-20	Size 20	Not included	Rc3/4"	Drum bung adapter (SUS304)	Please prepare suitable hose and connector separately.
	803405	STU-25-25	Size 25		Rc1"		
	803406	STU-40-40	Size 40		Rc1-1/2"		