


NDP-P20 Series 110L/min Maximum Flow Rate 3/4 inch Port Size

Metal Body Pumps



NDP-P20BA □

Plastic Body Pumps

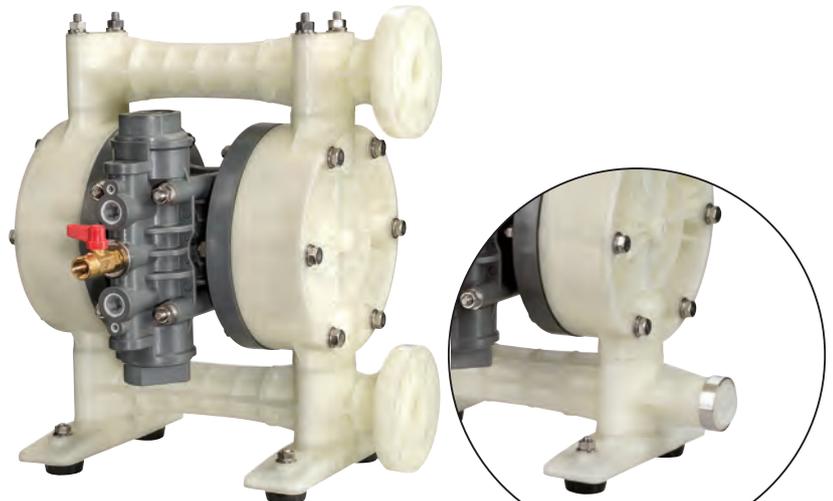

NDP-P20BP □ -FL
(Flange type)


(Rc type)



NDP-P20BTT

Specifications

Port Size		3/4" (20A)
Liquid	Intake	Metal Body: Rc3/4" or NPT3/4" Plastic Body: JIS/DIN/ANSI Compatible
	Discharge	Flange, Rc3/4" or NPT3/4" BTT: JIS Flange
Air	Supply	Rc1/4" or NPT1/4" includes ball valve
	Exhaust	Rc3/4" or NPT3/4" w/ silencer
Air Supply Pressure		0.2-0.7MPa (0.2-0.5MPa for P20BTT)
Maximum Discharge Pressure		0.7MPa (0.5MPa for P20BTT)
Discharge Volume Per Cycle		Rubber diaphragm: 350mL PTFE diaphragm: 240mL (290ml for P20BTT)
Maximum Size Solid		2mm
Net Weight		NDP-P20BA□: 7.5kg NDP-P20BS□: 12.5kg NDP-P20BP□: 7.0kg NDP-P20BTT: 20.0kg
Body Material		Aluminum, Stainless Steel, Polypropylene, PTFE
Diaphragm Material		Neoprene, Buna N, EPDM, Viton®, PTFE, Hytrel®, Santoprene®

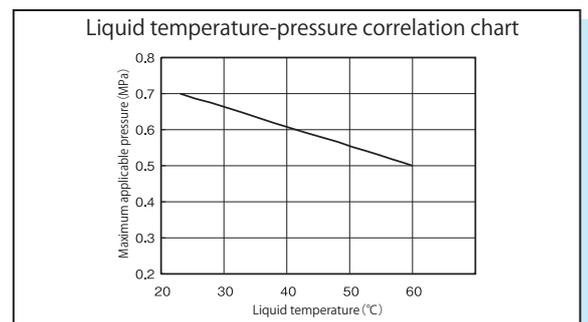

Dimensions and Performance Curve

